

# 400 Series

## 404C-22T

### Compact Industrial and Construction Power

45.5 kW/61.0 bhp

Developed in consultation with our market place, this 2.2 litre turbocharged engine increases the power range offered by the 400 Series to 45.5 kW or 61.0 bhp, meaning you can do more with your 400 Series than ever before.



#### Ultra-compact power

- The neatly installed side mounted turbocharger position provides additional power with minimum impact on package size making fitment into machines easier
- Up to 45.5 kW from an engine envelope of 0.25 m<sup>3</sup>

#### Clean and quiet

- Noise levels have been kept to a minimum
- Subjective harshness has been carefully controlled making the engine sound even quieter

The 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the construction, materials handling, agricultural/turf, genset and compressor markets, it has become another class leading diesel range from Perkins.

Built to the most demanding standards, the 400 Series engines meet all the requirements of EC Stage 2 and USA EPA Tier 2 off-highway emissions legislation for 2004, and bring significant improvements over their predecessors.

Long 500 hour service intervals, a two year standard warranty, low noise and harshness, and a wide range of options make the 400 Series range the complete solution for compact power needs.

The 404C-22T is a powerful but quiet 2.2 litre turbocharged unit delivering impressive performance with low operating costs in a small efficient package ideal for a range of off-highway applications

#### Durable power

- Product design and process improvements enhance both engine reliability and durability
- A new governor, valve seat inserts, and new compliance testing deliver reliability with 6000 hours durability
- A standard 2 year warranty demonstrates our confidence in durability and reliability

#### Low operating costs

- Oil and filter changes are now set at 500 hours as standard
- Engine durability and reliability, the warranty offering, and ease of installation combine to drive down the cost of ownership

#### Product support

- Total worldwide service is provided through 4000 service points around the world

Performance Data	Gross Intermittent (ISO/TR 14396)	Speed (rev/min)
Power Output (kW)	45.5	3000
Power Output (bhp)	61.0	3000
Peak Torque (Nm)	189.0	1800
Peak Torque (lbf ft)	139.0	1800

Power output for a run-in engine after 60 hours.

Photographs are for illustrative purposes only and may not reflect final specifications.

# 400 Series

## 404C-22T

### Engine Specification

- Cast iron engine block
- Flywheel and flywheel housing
- Fuel injection pump
- Split element fuel filter
- Glow plug starting aid
- Lub oil sump
- Spin on lub oil filter
- Inlet Manifold
- Cast iron exhaust manifold – side outlet
- Coolant pump belt driven
- Starter motor 12 volt
- Alternator 12 volt 65 amp
- ESOS
- Lub oil pressure switch
- Coolant temperature switch
- Provision for PTO
- Choice of cooling fans



### General Data

Number of cylinders	4 in-line
Bore and stroke	84 x 100 mm
Displacement	2.2 litres
Aspiration	Turbocharged
Cycle	4 stroke
Combustion system	Indirect injection
Compression ratio	23:3:1
Rotation	Anti-clockwise viewed on flywheel
Cooling system	Liquid
Total lubrication capacity	10.6 litres
Total coolant capacity	3.6 litres
Dimensions	Length 666 mm Width 516.3 mm Height 725 mm
Dry weight	194 kg

Final weight and dimensions will depend on completed specification.

### Option Groups

A selection of optional items is available to enable the customer to prepare a specification precisely matched to their needs.

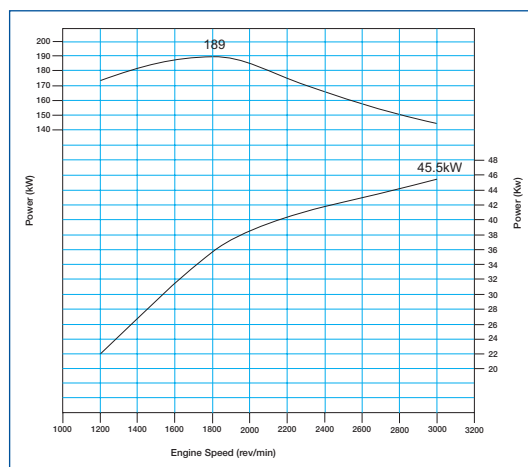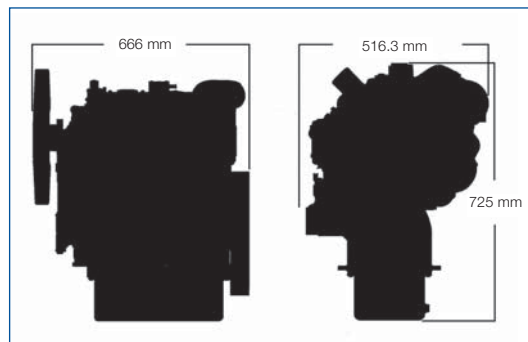

Note: lower speed ratings cannot be read from this curve.



### Perkins Engines Company Limited

Peterborough PE1 5NA  
United Kingdom  
Telephone +44 (0)1733 583000  
Fax +44 (0)1733 582240  
[www.perkins.com](http://www.perkins.com)

All information in this document is substantially correct at time of printing and may be altered subsequently  
Publication No. 1672/10/05 Produced in England ©2005 Perkins Engines Company Limited

Distributed by